




EFFECT OF MIXED FORMER AND TEMPERATURE ON THE CONDUCTIVITY Li+ION CONDUCTING GLASSES.

D. T. Dongare
Department of Physics ,
S.S.S. K.R. Innani Mahavidyalaya Karanja (Iad),
Dist.Washim,Maharashtra,India.

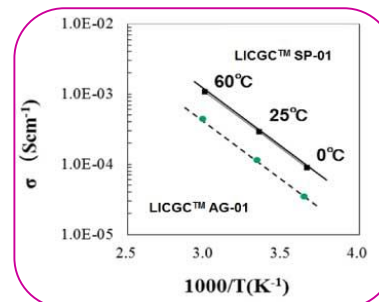

ABSTRACT

The Li+ ion conducting glasses of and former ratio $\gamma = \frac{B_2O_3}{B_2O_3 + Al_2O_3}$ ($0.71 \leq \gamma \leq 1$) modifier ratio $\eta = \frac{B_2O_3 + Al_2O_3}{Li_2O}$ ($\eta = 2.333$) have been prepared with various composition by using melt quenching technique. The nature of glass samples were confirmed by XRD and SEM. The dc electrical conductivity of glass samples were measured by using four probes method at different temperature (323K-623K). The effect of temperature and mixed former ratio has been observed and interpreted. It has revealed that dc conductivity obeys Arrhenius behavior and electrical conductivity of glass increases with increase in mole percent of aluminum oxide and temperature.

KEYWORDS: dc conductivity, XRD, SEM, Arrhenius behavior

INTRODUCTION

Electrical properties of glasses have been studied extensively for number of years due to their use in solid state devices and batteries. Introduction of metal oxide or alkali ions into glasses exhibit high conductivity as like semiconductor and can be used as solid electrolytes high energy density batteries (Fu.J.1996). In the literature, it has been reported that Bi_2O_3 occupy both network forming and network modifier. Therefore physical properties and electric properties of these glasses exhibit discontinuous changes due to role of structural cations changes (Baia.L.et al, 2003, Bale S. & Rahman S. 2008). It is reported that it shows significant change in the electrical properties of glasses with change in composition and temperature (Dalal.S.et al, 2015,2016).The electrical conductivity of lithium borate glasses has been investigated and special attention has been devoted to describe dielectric relaxation on the basis of dielectric parameters (.Dongare D.T &.Lad A.B., 2015).Aim of present work is to study the temperature dependence electrical conductivity in lithium borate glasses due to mixed former effect. It is reported that it shows significant change in the electrical properties of glasses with change in composition and temperature (Seema Dalal et al 2015)

PREPARATION OF MATERIAL AND EXPERIMENTAL:

The starting material lithium carbonate, boric acid and aluminum oxide of AR grade purchased from Merc laboratory were used. The aluminum lithium borate glasses of composition were prepared by melt quenching technique. A homogeneous mixture of different composition has melted in ceramic crucible by keeping it into Muffle furnace equipped with digital temperature controller. The materials were melted at 1150°C for two hours with heating rate $30^\circ\text{C}/\text{min}$ and molted material is quenched in aluminum mould at room temperature (27°C).The samples were annealed at 200°C for 2Hrs in hot air oven. These samples were stored in desiccators and taken only at the time of measurement. The structure of sample was confirmed by the measurements of XRD using XPERT PRO DIFFRACTOMETER and SEM by using ZEISS Ultra SEM

instrument. The samples were in circular disc shapes, polished by using sand paper. The good quality paint was applied on both flat surfaces of sample and after drying it was loaded in the sample holder of four probe method for conductivity measurement.

The DC conductivity of samples has been calculated by using following relation.

$$\sigma_{dc} = \frac{d}{RA} \quad \text{..... (1)}$$

Where , d is the thickness of sample and A is the area of cross section. Activation energy of glass material was determined by using Arrhenius equation

$$\sigma_{dc} = \sigma_0 \exp [-E_a/KT] \quad \text{..... (2)}$$

RESULT AND DISCUSSION:

The XRD spectra of investigated samples have been found as shown in Fig.1. Only broad peak has been observed for glass samples, indicating that these glass samples are composed glassy phase. However, glass samples shows peaks superimposed on weak halo pattern in XRD, indicating partial crystallization. XRD and SEM confirmed the amorphous nature of sample. Fig.2 shows SEM of L1BA sample.

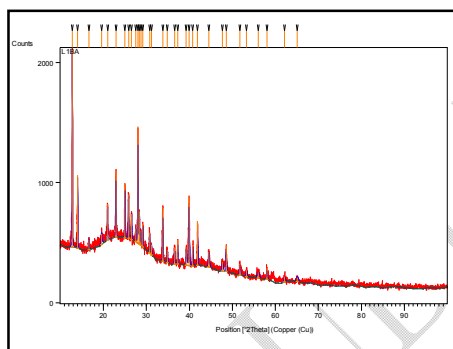


Fig.1: XRD of L1BA sample

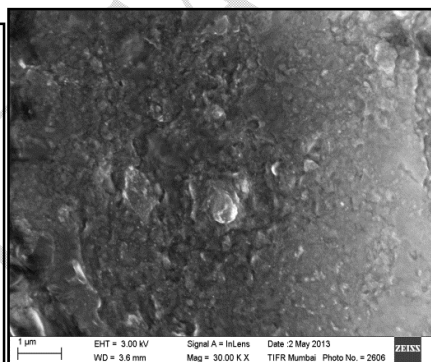


Fig.2: SEM of L1BA sample

The variation of conductivity as a function of $10^3/T$ for the glass samples of different former ratio with modifier ratio ($\eta = 2.333$) is depicted in Fig.3. For all the samples, it is observed that the dc conductivity (σ_{dc}) obeys Arrhenius behavior. The activation energy calculated from the graph is listed in the Table.1. The compositional dependence of dc conductivity (σ_{dc}) at 323K and the activation energy (E_{dc}) of glass is shown in Fig.4. The dc conductivity (σ_{dc}) for glasses containing Al_2O_3 exhibits lower values than that for Al_2O_3 free glass whereas E_{dc} increases with increasing Al_2O_3 content. Such behavior is related to structural modifications observed with the addition of Al_2O_3 as a result of interlinking between borate chain and aluminum tetrahedral unit. The decrease of conductivity is due to network regulation by formation B-O-Al and Al-O-Al bond and presence of the large amount of Al_2O_3 increases an ionic character therefore it reduces Li^+ ions mobility and breaks conduction path.

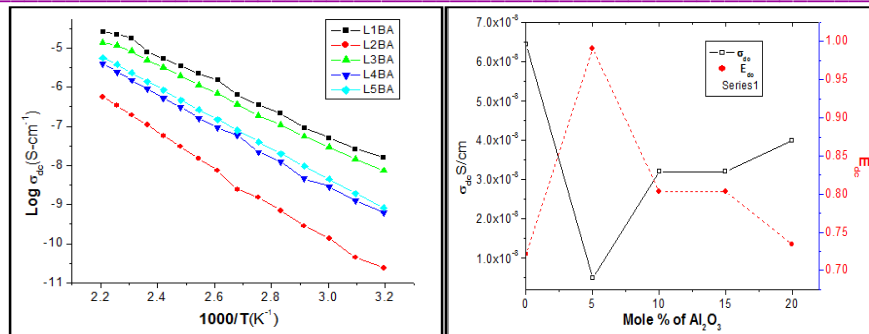


Fig.3: Temperature dependent conductivity

Fig 4: E_{dc} & σ_{dc} modifier ratio ($\eta = 2.333$)

The results are parallel with the report (Gedam R.S. & Deshpande V.K.2009). No glass composition in the system presents higher conductivity than conductive binary glass (30Li₂O:70B₂O₃) therefore it shows that there is no evidence of existence of mixed former effect in the system. It is observed that glass sample L₁BA exhibits high conductivity and low activation energy. The conductivity of sample L1BA has been found to be 6.64×10^{-8} S/cm (323K). The activation energy calculated from the slope of fitted line has been found to be 0.85 ± 0.1 eV for this series.

Table.1: Activation energy and dc conductivity of series I (L1BA-L5BA)

Sample code	Mole % of Li ₂ O	Mole % of Al ₂ O ₃	Mole % of B ₂ O ₃	Modifier ratio (η)	Former ratio (γ)	σ_{dc} S/cm (323K)	E_{dc} (eV)
L1BA	30	0	70	2.333	1	6.44E-8	0.721
L2BA	30	5	65	2.333	0.9285	4.92E-9	0.991
L3BA	30	10	60	2.333	0.8571	3.2E-8	0.803
L4BA	30	15	55	2.333	0.7857	3.2E-8	0.803
L5BA	30	20	50	2.333	0.7143	3.99E-8	0.734

CONCLUSION:

The effect of compositional changes by addition of second former Al₂O₃ into Li₂O:B₂O₃ glass on electrical conductivity has been investigated. It was observed that dc conductivity decreases with addition of Al₂O₃ which is attributed to structural modification and formation of Al-O-B linkage, resulting in hinders the migration of Li⁺ ions. The maximum conductivity was observed for Al₂O₃ free glass and it indicates that the mixed former effect does not exist in these compositions. The conductivity of glass increases with increase in temperature and Arrhenius behavior has observed for all samples.

ACKNOWLEDGEMENT:

Author is thankful to Principal Dr.P.R.Rajput S.S.S.K.R.Innani Mahavidyalaya Karanja lad, PGTD Nagpur and Principal Vidyabharati Mahavidyalaya Amravati for providing facilities.

REFERENCES:

1. Fu J. (1996). Super cooled Liquids and glasses. Journal of Physical. Chem., Vol 37, 84-86.

2. Baia L., Stefan R., Popp J., Simmon S., Kiefer W. (2003). Vibrational spectroscopy of highly iron doped B_2O_3 - Bi_2O_3 glass systems. *Journal Non Crystalline Solids*, Vol 324, 109-117.
3. Bale S., Rahman S. (2008). Effect of SiO_2/B_2O_3 Replacements on the Structure, Physicochemical and Electrical Properties of Bi_2O_3 -Containing Glasses. *Opt.Mater*, Vol 31, 333-337.
4. Dalal S., Dahiya S., Ahsima, Khasa S. (2015). Effect of substitution iron on structural, thermal & dielectric properties of lithium borate glasses. *Material Research Bulletin*, Vol 70, 559-566.
5. Dalal S., Dahiya S., Khasa S., Dahiya M.S. (2016). Structural study and DC conductivity of vanadyl doped zinc lithium borate glasses. *Journal of Integrated Science and Technology*, Vol 4(1), 1-4.
6. Dongare D.T. & Lad A.B. (2015): Electrical conductivity and dielectric relaxation of lithium alumino borate glasses. *International Journal of Metallurgical & Materials Science and Engineering*, Vol 5(1), 1-8.
7. Ingram M.D. (1987): Ionic conductivity in glass. *Phys. Chem. Glasses*, Vol 28(6), 215.
8. Gedam R.S. & Deshpande V.K. (2009): Enhancement in conductivity of $Li_2O:B_2O_3:Al_2O_3$ glasses. *Bull. Mater. Science*, 32, 83-87.
9. Seema Dalal (2015): "Effect Of Substitution Iron On Structural, Thermal & Dielectric Properties Of Lithium Borate Glasses." *Material Research Bulletin*, Vol. 70, 559-566.
10. Seema Dalal (2015): "Structural study and DC conductivity of vanadyl doped zinc lithium borate glasses" *Material Research Bulletin*, Vol. 1665(1), 7-12.